

# KSE VS 150

THE ORIGINAL REVISITED

CLASSIC LINE  
2 YEARS OF WARRANTY



- ➔ Variable speed: high efficiency for each application, optimised consumption
- ➔ 5 programs, 3 preselected speeds
- ➔ Super-silent operation
- ➔ Visibility of the internal prefilter, easy access
- ➔ Impeller and diffuser made of Noryl®, very hard-wearing and corrosion-resistant
- ➔ Double drain, easy opening (no tools required)
- ➔ Connections: ANSI 1½-2", includes slip unions for Ø 50 and Ø 63 mm
- ➔ Suitable for use in salt water
- ➔ Usage: for residential pools up to 126 m³



Union fittings provided, 50 and 63 mm diameter, to fit in any existing installation

Code	Ref.	P2 Hp	P1 kW	A (mm)	Flow rate (m³/h)*	Weight (kg)	Pack. (mm)	qty/pallet	M.O.Q.**
010904101520	KSE VS 150	1.50	1.24	605	21	15	300 x 255 x 650	25	1

P1: Input Power P2: Nominal Power

\* 10 m water column pressure


\*\* (minimum order quantity)



**Single Speed models can be easily replaced with a VS equivalent.**  
(No need to retrofit or modify hydraulic connections).

## Technical Specifications

Max. water temp. / Max. pressure	50°C / 2,5 bar
Connection (DIN slip included, for others please ask)	Ø 50 - 1 ½" and Ø 63 - 2"
Mechanical seal	AISI 316, suitable for salt water
Motor specifications	Class F, IP55, 50 Hz 2.850 rpm
Housing/impeller/strainer/lid	PP + F.G/Noryl®/PP/SAN®

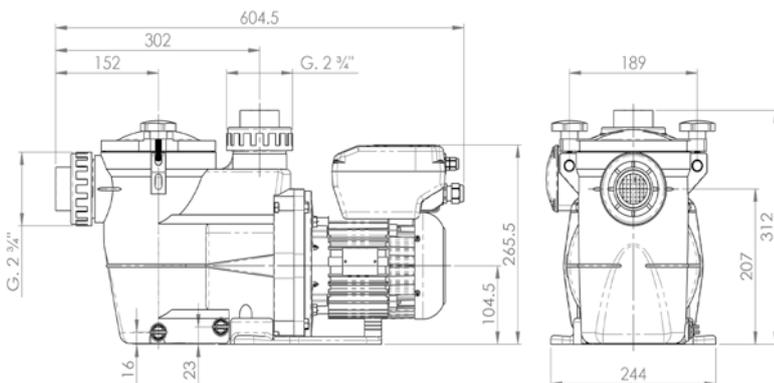

Water column pressure (m)

